



Unified Planning Procedures Manual

June 2023

Unified Planning Procedures Manual

June 2023



صاحب السمو الملكي الأمير سلمان بن حمد آل خليفة
ولي العهد رئيس مجلس الوزراء حفظه الله تعالى.



صاحب السمو الملكي الأمير سلمان بن حمد آل خليفة
ولي العهد رئيس مجلس الوزراء حفظه الله تعالى.

Table of Contents

Executive Summary

Section 1: Requirements of the Urban Planning and Development Authority	7
Section 2: Requirements of the Ministry of Works Road Planning and Design Directorate	38
Section 3: Requirements of the Ministry of Works Sanitary Engineering Planning & Projects Directorate	45
Section 4: Requirements of the Ministry of Municipalities Affairs and Agriculture Engineering & Water Resources Directorate	55
Section 5: Requirements of the Electricity and Water Authority Electricity Distribution Directorate	59
Section 6: Requirements of the Electricity and Water Authority Water Distribution Directorate	66
Section 7: Requirements of the Electricity and Water Authority Planning and Studies Directorate	71
Section 8: Requirements of the Telecommunications Regulatory Authority	77

Executive Summary

The Urban Planning and Development Authority Procedures Manual aims to unify and streamline the approved technical requirements for the services provided by the Authority. The issuance of this Manual has coincided with the launch of the **PLANNING** system that allows licensed engineering offices in the Kingdom of Bahrain to submit planning applications for individuals and companies, inquire about the status of applications, obtain advisory services by government agencies concerned with planning services, and pay fees for services. The Manual also facilitates for applicants to obtain all the information that helps them to prepare the documents and drawings required for submission of applications by displaying all requirements, legislations and documents related to planning services.

The Manual contains the technical requirements of the Urban Planning and Development Authority applications for the following government agencies:

- o **Ministry of Housing and Urban planning:**
 - Urban Planning and Development Authority.
- o **Ministry of Works:**
 - Road Planning and Design Directorate.
 - Sanitary Engineering Planning & Projects Directorate.
- o **Ministry of Municipalities affairs and Agriculture:**
 - Agriculture Engineering & Water Resources Directorate.
- o **Electricity and Water Authority:**
 - Electricity Distribution Directorate.
 - Water Distribution Directorate.
 - Planning and Studies Directorate
- o **Telecommunications Regulatory Authority.**

Note:

- If the Manual does not cover all topics and requirements, please contact the Customer Services Department on: **17682888** or via e-mail: **support@planning.bh**
- This Manual is made in Arabic and English. If any inconsistency or differences found between both versions, the Arabic language version shall prevail.
- To view the online version of the Manual, please visit **WWW.PLANNING.BH**

Section 1

Requirements of the Urban Planning and Development Authority

Table of Content

1. Definitions	9
2. Planning Applications	10
3. Required Documents	13
4. Laws, Legislations and Resolutions Related to Planning Applications.	17
5. Technical Requirements and Standards on the Division and Merging of Lands Intended for Construction and Development.	19

1- Definitions

Minister: Minister of Urban Planning and Development.

Authority: Urban Planning and Development Authority.

Competent municipality: The municipality of the area where the property is located.

Competent authorities: Government agencies, public authorities and institutions that should be consulted within the limits of their competencies as set forth in the relevant laws and resolutions.

Specialized Consultancy Offices: The offices, institutions or companies approved by the competent authorities and carrying out the functions of urban planning, zoning, engineering, architecture, surveying, etc.

Construction: The process of building, preparation for building, division of land in preparation for the construction of buildings or land reclamation for building or excavation for mining, or any operation above or under the ground or making any fundamental change in the use of buildings, lands or spaces.

Construction Control:

(a) Approving, permitting, regulating, limiting or prohibiting construction or any related work, either with or without specified conditions.

(b) Setting conditions on the performance of the body responsible for approving, permitting, regulating, limiting or prohibiting construction or any related work, either with or without specified conditions.

Regulatory Requirements for Construction: The regulatory requirements for construction in the various areas of the Kingdom, issued by a decision of the Cabinet as contained in Article (20) of the Building Organization Law promulgated by Legislative Decree No. (13) of 1977 and amendments thereof.

Construction Areas: Areas designated by a Minister's decision and to which the regulatory requirements for reconstruction are applied.

Submerged areas/lands: Land which is permanently or partially submerged by water.

Right of Way: the space provided between the properties on the opposite sides of the road and overlooking the road, and it includes viewing angles, intersections and spaces reserved for public utilities along the road.

Pedestrians and Services Paths: the space that separates properties or parallel to roads and is used for the passage of pedestrians, services, or both. Motor vehicles are not permitted to pass through them.

Zoning: Each division of a plot of land overlooking an approved street into two or more plots within the scope of the areas stipulated in Legislative Decree No. (3) of 1994 on the Division of Lands Intended for Construction and Development and the executive regulations issued by a decision of the Minister with the intention of construction or development.

Executive Regulations: The Executive Regulations of Legislative Decree No. (3) of 1994 on the Division of Lands Intended for Construction and Development and the executive regulations issued by a decision of the Minister.

Development Projects: multi-use, large-scale urban projects developed by the private sector in accordance with the agreements concluded with the government of the Kingdom of Bahrain and according to the specifications and requirements of the authorities concerned with infrastructure services. The general plans and detailed schedules are approved by the Urban Planning Affairs based on similar specialized studies for special nature area projects submitted by the developer.

2- Planning Applications

2.1: Subdivision According to the Approved Zones

Examining the division of a plot of land into 5 plots or less without creating any streets in coordination with the relevant authorities in accordance with the Urban Planning Law, the Land Zoning Law, their executive regulations and construction regulatory requirements. (Only engineering offices can apply for this application)

2.2: Subdivision within the Development Projects

Examining the division of a plot of land into 5 plots or less without creating any streets within the development projects (such as: Durrat Al Bahrain, Diyar Al Muharraq, Amwaj Islands, etc.) in coordination with the relevant authorities in accordance with the approved general plan for the project, the Urban Planning Law, the Land Zoning Law, their executive regulations and construction regulatory requirements. (Only engineering offices can apply for this application)

2.3: Subdivision According to the Approved Zones

Examining the subdivision, with the creation of streets in coordination with the relevant authorities in accordance with the Urban Planning Law, the Land Zoning Law, their executive regulations and construction regulatory requirements, which are a part of Development Projects **(Only engineering offices can apply for this application)**

2.4: Subdivision within Development Projects

Examining the Subdivision of a plot of land or plots of lands into more than 5 plots within the development projects (eg. Durrat Al Bahrain, Diyar Al Muharraq, Amwaj Islands, etc.) with the creation of streets in coordination with the relevant authorities in accordance with the approved general plan for the project, the Urban Planning Law, the Land Zoning Law, their executive regulations and construction regulatory requirements. **(Only engineering offices can apply for this application)**

2.5: Land Merging

Examining the merging of contiguous lands owned by the same owner and bearing the same approved zoning according to the approved zoning maps.

2.6: Land Merging within Development Projects

Examining the merging of contiguous lands within development projects (eg. Durrat Al Bahrain, Diyar Al Muharraq, Amwaj Islands etc.), which are owned by the same owner and have the same uses according to the approved plan for the project in coordination with the relevant authorities in accordance with the regulatory requirements for reconstruction, the executive regulations and the approved general plan for the project. (Only engineering offices can apply for this application)

2.7: Subdivision with Change of Zoning

To study the subdivision the plot also including studying the road development in coordination with the relevant authorities and according to the construction zoning regulations and land subdivision regulations, Then will study the zoning of a plot or number of plots that does not have an approved zoning according to the approved zoning maps from a technical and planning point of view in line with the general plan of the region and in coordination with the relevant authorities and obtain the necessary approvals.(such as: Durrat Al Bahrain, Diyar Al Muharraq, Amwaj Islands, etc.)

***Services From (2.1 to 2.7) can only be applied by engineering offices**

2.8: Land Zoning/Change of Zoning

Examining the zoning / change of zone of a plot of land or plots of lands in accordance with the technical and planning studies in coordination with the relevant authorities and obtaining the necessary approvals. (Only engineering offices can apply for this application)

2.9: Freeze parcel

Examining the Government applications to temporarily freeze a plot of land or plots of lands because it is affected by development projects or re-planning.

2.10: Freeze parcel removal

Examining the applications to unfreeze a plot of land or plots of lands from building permit system in coordination with the relevant authorities to enable land owners to develop the plot as per the approved building regulations.

2.11: Parcel inquiry

An inquiry submitted by the property owner to inquire about the status of the property within an unplanned area, an area under study, or a property whose status has been modified.

2.12: Plot boundary zone

The Plans Implementation and Amendment Section is studying the modification of the status of some private real estate in coordination with service agencies in favor of developing the area schematically and developing its road network.




3- Required Documents

	Required Documents	Land Subdivision Request	Land Merging Request	Land Zoning/Change of Zoning Request	Freeze Parcel	Freeze Parcel Removal	Parcel inquiry	Subdivision with change of zone	Plot boundary zone
1	Copy of the title deed/deeds	✓	✓	✓	✓	✓	✓	✓	✓
2	Copy of the smart card from both sides of the owner or a copy of the commercial register for establishments and companies.	✓	✓	✓		✓	✓	✓	✓
3	Copy of survey certificate					✓			
4	A letter requesting the division of the land or lands from the owner or the authorized person to submit the request (if the property belongs to heirs, the letter must be signed by all the heirs).	✓	✓				✓	✓	
5	The proposed division map in (AutoCAD/MicroStation) format.	✓						✓	
6	Copy of the land use table in Excel format, if the land falls within the approved general plan for a development project (such as: Durrat Al Bahrain, Diyar Al Muharraq, Amwaj Islands, ... etc.).	✓	✓					✓	
7	The approval of the developer if the land falls within the approved general plan for a development project (such as: Durrat Al Bahrain, Diyar Al Muharraq, Amwaj Islands, ... etc.)	✓	✓					✓	
8	Copy of the certificate of completion of the reclamation from the area municipality, if the land falls within the submerged areas.	✓	✓	✓				✓	✓
9	If the applicant is the owner's attorney-in-fact, a copy of the power of attorney certified by the Ministry of Justice and Islamic Affairs and a copy of the attorney-in-fact 's smart card must be submitted.	✓	✓	✓				✓	✓
10	If the applicant is a company, a copy of the commercial registry and a copy of the authorization and the smart card of the authorized person must be provided.	✓	✓	✓		✓		✓	✓
11	If the applicant is a governmental entity, unit number should be provided	✓	✓	✓				✓	✓
12	In case of heirs, applicants shall provide a copy of the Inheritance Quota, a letter signed by all heirs for authorization and copies of the smart card of all quota heirs.	✓	✓	✓		✓	✓	✓	✓
13	Type of project to be built for classification/reclassification requests within the project areas of a special nature.			✓				✓	✓
14	A copy of the approval of the Private Education Directorate in case of request for the establishment of a private school/kindergarten.			✓				✓	✓



3.1: CAD drawing standards for UPDA E-SEERVICE APPLICATIONS:

3.1.1: General drawing standards to be followed

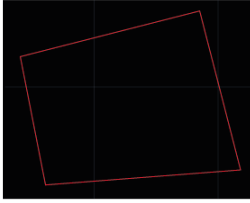- All layers should have elements/entity which are either Closed shape (Polygons) and/or Text. There should be no Lines or Points in the file.

Sample	Validity	Description
	✓	Example showing valid Ownership Boundary Polygon (shape)
	✓	Example showing valid Sub-division Boundary Polygon (shape) with Subdivision Text
	✓	Example showing valid Parcel Boundary Polygon (shape) for Merging Plots with Parcel Number Text

- Polygons must not overlap each other.

Sample	Validity	Description
		Overlapping Plots/Parcels

- A polygon should be drawn as one closed shape (polygon) and not as a set of lines.
- In polygons, avoid the use of shading (hatching).
- Organize Data by CAD layer and use different levels/Layers for all feature as described in following sections.
- The Layer/Level Names mentioned in the following section should be strictly followed. Otherwise the system will NOT accept the uploaded drawing file. The uploaded file should have ONLY the layers described in the table above. Any additional layers or graphic elements like frame, legend, logos, arrow etc. should not be used in the file that is to be uploaded through the application.
- The node of the parcel/road labels should be within the polygon (parcel/road) it denotes.
- There should ONE and ONLY ONE text label for a polygon (parcel/road).
- The file that should be uploaded should be in **DGN** or **DWG** format (**Microstation** or **Auto CAD**)

- Following **Global Coordinate System** should be used:

- **Ellipsoid:** International 1924
- **Projection:** UTM Zone 39
- **False Easting:** 500,000
- **False Northing:** 0
- **Central Meridian:** 51 Degrees Longitude- **Scale Factor:** 0.999600
- **Latitude of Origin:** 0
- **Linear Unit:** Meter (1.000000)
- **Datum:** D_Ain_el_Abd_1970

3.2: Subdivision (MAJOR & MINOR) Specifications:

- The CAD file for Subdivision Application Data Upload should have ONLY the following Layers.

#	Layer Name	Element / Entity Type	Mandatory	Description
1.	Parcel Boundary	Shape (polygon) /Polyline Closed	Yes	The main parcel boundary polygon (Ownership Boundary) which needs to be subdivided
2.	Subdivisions	Shape (polygon) /Polyline Closed	Yes	The proposed polygon Plots for Sub-Divisions
3.	Subdivision Text	Text	Yes	The Plot Number inside each of the sub-division plots
4.	Road	Shape (polygon) /Polyline Closed	No	Proposed Road Polygon for Subdivision if any. Mandatory when there is a proposed road otherwise not mandatory
5.	Road Text	Text	No	Any Text information related to the proposed road. (e.g., Proposed road number or road width may be provided as Textual information in this layer). Mandatory when there is a proposed road otherwise not mandatory
6.	Parcel Text	Text	* No ** Yes	For Subdivisions of Multi Parcel, this Layer is mandatory. It should have the parcel numbers for all the main parcels that are proposed to be subdivided. To be placed within the parcel boundary polygons.

* When only a Single Main Parcel is required to be subdivided in the Subdivision request, this Layer/Level is NOT Mandatory.

** When more than one Main Parcel is required to be subdivided in a single SDN request, this Layer/Level is Mandatory

3.3: Merging Plots Specifications:

- The CAD file for Merging Plot Application Data Upload should have ONLY the following Layers.

#	Layer Name	Element / Entity Type	Mandatory	Description
1.	Parcel Boundary	Shape (polygon) /Polyline Closed	Yes	All the parcel boundary polygon (Ownership Boundary) which needs to be merged into a single parcel
2.	Parcel Text	Text	Yes	The parcel number for all the parcels that are proposed to be merged. To be placed within the parcel boundary polygons
3.	Merged Plot	Shape (polygon) /Polyline Closed	Yes	The proposed boundary polygon after merging of all the plots/parcels.

4- Laws, Legislations and Resolutions Related to Planning Applications

4.1: Subdivision/Merging of Land Intended for Construction and Development:

4.1.1: Legislative Decree No (2) of 1994 on Urban Planning.

4.1.2: Legislative Decree No (3) of 1994 with respect to Division of Lands Intended for Construction and Development.

4.1.3: Resolution No (28) of 2009 Issuing the Regulatory Requirements for Construction in the Various Areas of the Kingdom and amendments thereof.

4.1.4: Resolution No (56) of 2009 Issuing the Executive Regulations of Legislative Decree No (3) of 1994 with respect to Division of Lands Intended for Construction and Development and amendments thereof.

4.1.5: Requirements for waterfront areas.

4.1.5: Resolution No (317) of 2021 issuing the Executive Regulation of Legislative Decree No (3) of 1994 with respect to the Division of lands Intended for Construction and Development and Amendments thereof.

Note: The Authority has the right to reject any application that does not comply with the relevant laws, regulations and resolutions issued on the division or merging of lands.

4.2: Land Zoning/Change of zone:

4.2.1: Legislative Decree No (2) of 1994 on Urban Planning.

4.2.2: Legislative Decree No (3) of 1994 with respect to Division of Lands Intended for Construction and Development.

4.2.3: Resolution No (28) of 2009 Issuing the Regulatory Requirements for Construction in the Various Areas of the Kingdom and amendments thereof.

4.2.4: Legislative Decree No (36) of 2016 on the Adoption of the Strategic Structural Plan for the Kingdom of Bahrain.

4.2.5: The Law on the Constructional Organization of Buildings promulgated by Legislative Decree No. (13) of 1977, as amended, and in particular Article (20) thereof.

4.2.6: Resolution No (56) of 2009 Issuing the Executive Regulations of Legislative Decree No (3) of 1994 with respect to Division of Lands Intended for Construction and Development and amendments thereof.

4.2.7: The Municipalities Law issued by Legislative Decree No. (35) of 2001, the amendments thereof, and the Executive Regulations issued by Resolution No. (16) of 2002, and the amendments thereof.

4.2.8: Law No. (6) of 2005 Amending some of the Provisions of the Legislative Decree on Land Acquisition for the Public Benefit, Buildings Organization, Urban Planning, Division of Land Intended for Construction and Development and Public Road Works.

4.2.9: Law No. (39) of 2009 on Land Acquisition for the Public Benefit.

4.2.10: Ministerial Order No (76) of 2015 on the Detailed Plan for the Greenbelt area-southern part.

4.2.11: Resolution No (316) of 2021 Determining the fees for rezoning zoned lands

Note: The Authority has the right to reject any application that does not comply with the relevant laws, regulations and resolutions. The following applications shall not be accepted:

- 1- The land does not overlook one or more streets, according to the title deed.
- 2- The land is located in an unplanned area (UP).
- 3- The land is affected by the building line.
- 4- The land is intertwined with other properties.
- 5- The land is located in the green belt area.
- 6- The land is located in an understudy (US) area and its final plan has not been approved.
- 7- The land is affected by a strategic project.

4.3: Freeze parcel / Freeze parcel removal:

4.3.1: Article No (14) of Resolution No (1) of 1994 Issuing the Executive Regulations of Legislative Decree No (2) of 1994 with respect to urban planning.

4.3.2: Article No (21) of Legislative Decree No (35) of 2001 with respect to issuance of the Municipal Law and its amendments.

4.4 Subdivision with change of zone:

- 4.4.1 Decree-Law No. (2) of 1994 regarding urban planning.
- 4.4.2 Decree-Law No. (3) of 1994 regarding the division of lands intended for reconstruction and development.
- 4.4.3 Resolution No. (28) of 2009 issuing regulatory requirements for construction in various regions of the Kingdom and its amendments.
- 4.4.4 Decree-Law No. (36) of 2016 approving the strategic structural plan for the Kingdom of Bahrain.
- 4.4.5 Buildings Regulation Law promulgated by Legislative Decree No. (13) of 1977, and its amendments, in particular Article (20) thereof.
- 4.4.6 Resolution No. (56) of 2009 issuing the executive regulations for Decree-Law No. (3) of 1994 regarding the division of lands intended for reconstruction and development and its amendments.
- 4.4.7 Municipalities Law promulgated by Decree Law No. (35) of 2001, and its amendments, and its executive regulations issued by Resolution No. (16) of 2002, and its amendments.
- 4.4.8 Law No. (6) of 2005 Amending Certain Provisions of Decrees-by-Laws Concerning Land Acquisition for Public Benefit, Organization of Buildings, Urban Planning, Dividing Lands for Reconstruction and Development, and Occupying Public Roads.
- 4.4.9 Law No. (39) of 2009 regarding the appropriation of real estate for the public benefit.
- 4.4.10 Ministerial Resolution No. (76) of 2015 regarding the detailed plan for the green belt area - the southern part.
- 4.4.11 Decree-Law No. (2) of 1994 regarding urban planning.
- 4.4.12 Decree-Law No. (3) of 1994 regarding the division of lands intended for reconstruction and development.
- 4.4.13 Resolution No. (28) of 2009 issuing regulatory requirements for construction in various regions of the Kingdom and its amendments.
- 4.4.14 Decree-Law No. (36) of 2016 approving the strategic structural plan for the Kingdom of Bahrain.
- 4.4.15 Buildings Regulation Law promulgated by Legislative Decree No. (13) of 1977, and its amendments, in particular Article (20) thereof.

- 4.4.16** Resolution No. (56) of 2009 issuing the executive regulations of Decree Law No. (3) of 1994 regarding the division of lands intended for reconstruction and development and its amendments.
- 4.4.17** Municipalities Law promulgated by Legislative Decree No. (35) of 2001, and its amendments, and its executive regulations issued by Resolution No. (16) of 2002, and its amendments.
- 4.4.18** Law No. (6) of 2005 Amending Certain Provisions of Decree Laws Concerning Land Acquisition for Public Benefit, Organization of Buildings, Urban Planning, Dividing Lands for Reconstruction and Development, and Occupying Public Roads.
- 4.4.19** Law No. (39) of 2009 regarding the appropriation of real estate for the public benefit.
- 4.4.20** Ministerial Resolution No. (76) of 2015 regarding the detailed plan for the green belt area - the southern part.

4.5 Plot boundary zone:

- 4.5.1** Decree-Law No. (2) of 1994 regarding urban planning.
- 4.5.2** Decree-Law No. (3) of 1994 regarding the division of lands intended for reconstruction and development.
- 4.5.3** Resolution No. (28) of 2009 issuing regulatory requirements for construction in various regions of the Kingdom and its amendments.
- 4.5.4** Decree-Law No. (36) of 2016 Approving the Strategic Structure Plan for the Kingdom of Bahrain.
- 4.5.5** The Buildings Regulation Law promulgated by Legislative Decree No. (13) of 1977, and its amendments, in particular Article (20) there of.
- 4.5.6** Resolution No. (56) of 2009 issuing the executive regulations for Decree-Law No. (3) of 1994 regarding the division of lands intended for reconstruction and development and its amendments.
- 4.5.7** The Municipalities Law issued by Decree Law No. (35) of 2001, and its amendments, and its executive regulations issued by Resolution No. (16) of 2002, and its amendments.
- 4.5.8** Law No. (6) of 2005 Amending Certain Provisions of Decree Laws Concerning Land Acquisition for Public Benefit, Organization of Buildings, Urban Planning, Dividing Lands for Reconstruction and Development, and Occupying Public Roads.
- 4.5.9** Law No. (39) of 2009 Concerning the Acquisition of Real Estate for the Public Benefit.

4.5.10 Ministerial Resolution No. (76) of 2015 regarding the detailed plan for the green belt area - the southern part.

Note: The Authority has the right to reject any request that is not in line with the relevant laws, regulations and decisions issued, and the following requests are not accepted:

- The property does not overlook one or more streets, according to the title deed
- The property is located in an unplanned area (UP).
- The property is affected by the burial line
- The property is intertwined with other properties.
- The property is located within the green belt area.
- If the property is located within an area under study (US) and the final plan has not been approved.
- If the property is affected by a strategic project

5- Technical Requirements and Standards on the Subdivision and Merging of Lands Intended for Construction and Development.

5.1: Streets and Roads:


5.1.1: The width of the streets and roads in the different zoning projects must not be less than what is mentioned in the Executive Regulations and in line with the general and detailed plans for the areas and according to the requirements of the relevant authorities, as follows:

- 25 meters in the “A” investment buildings areas.
- The road widths for the manufacturing industrial projects zones “A” and “B” are determined in coordination with the competent authorities.
- 20 meters in all construction areas in the Kingdom, except for what is mentioned in clauses (A) and (B) of this article. Street widths may be increased or decreased to a lesser extent supported by technical justifications and after obtaining the approval of the concerned authorities as needed.


5.1.2: The following criteria must be observed in the various division projects as follows:



- Connecting the streets and roads proposed in the zoning plan to the existing and future road network of the area.
- Internal roads must be designed in a manner that discourages high traffic volumes from using them.

- Long dead-ends roads that exceed 45 meters in length should be avoided in the plans. Design aspects that contribute to the flow of traffic must be followed.



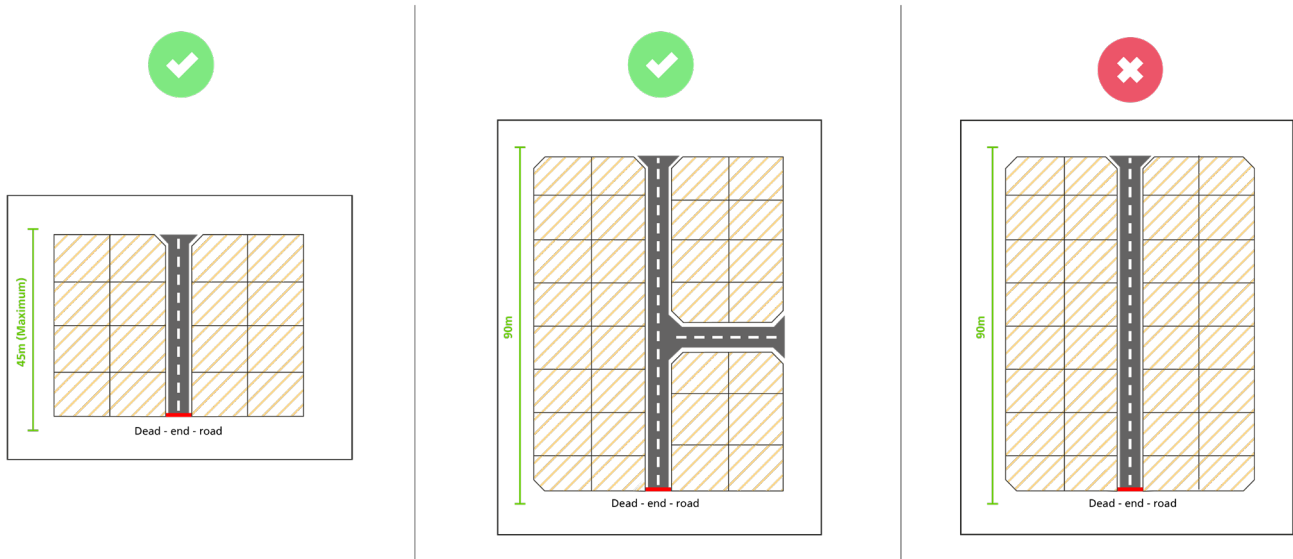


- Provide adequate visibility angles for suggested street widths and turning angles on dead-end roads in accordance with the standards and requirements of the Road Planning and Design Directorate.


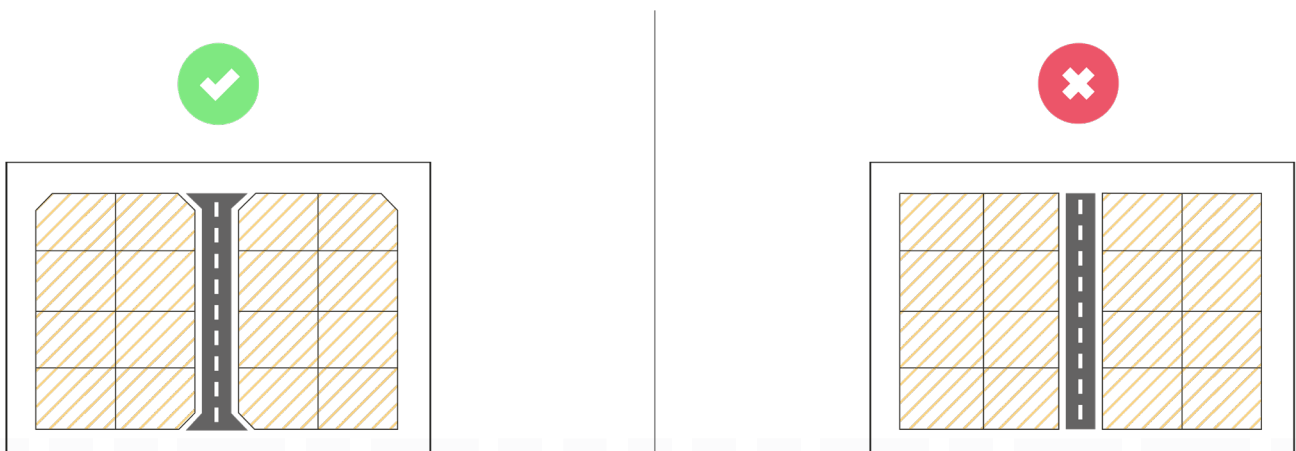


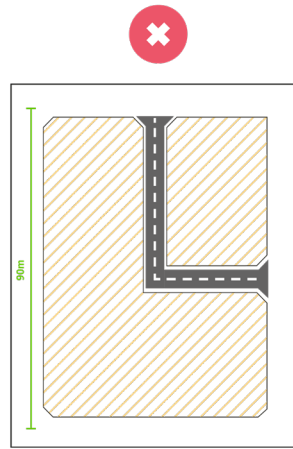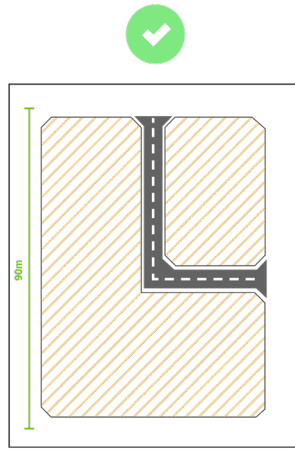


- Provide pedestrian paths with a width of 3 meters if block length is more than 244 meters. This does not apply if the depth of the pedestrian path is more than 60 meters.

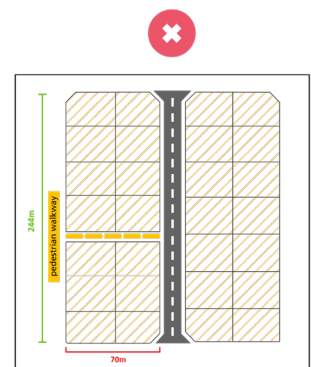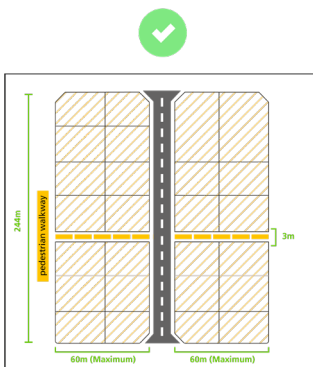

- Provide 3-meter-wide separation passageways in the case of service areas (mosque, park, power station, etc.) adjacent to residential blocks.

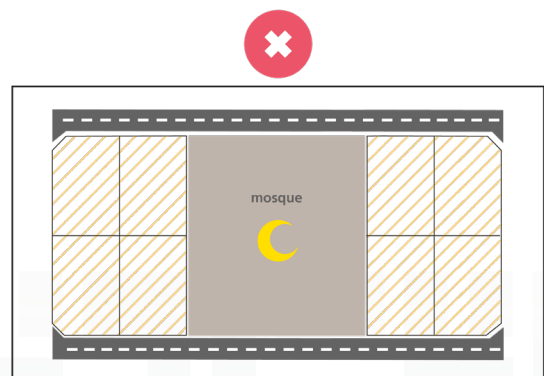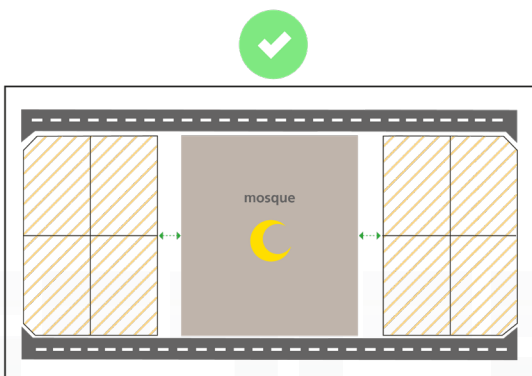


- Provide 3-meter-wide separation passageways between the different uses of land, and separating passageways between the lands of the investment buildings shall be provided with a width of 5 meters if there is no separating road.

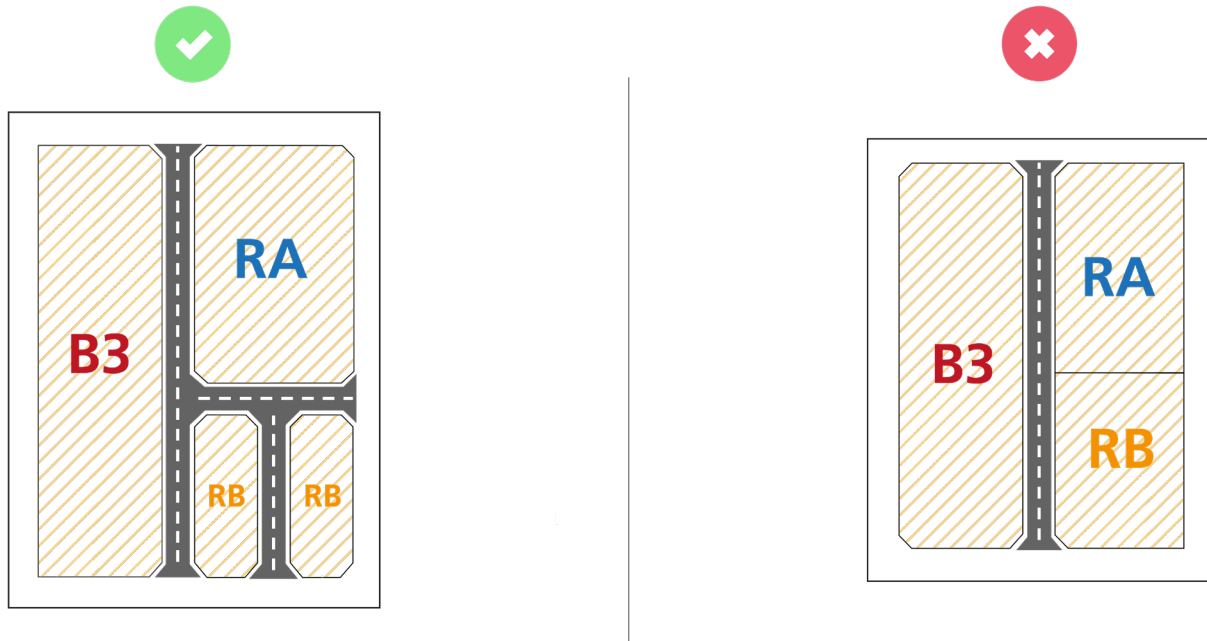

5.2: Area of plots of lands requested to be divided:


5.2.1: The area of the plots of lands in the proposed division plan in the various regions must not be less than what is mentioned in the executive regulations, as follows:

1. Private Residential Areas "A" (RA): The plot of land is not less than 300 square meters, provided that the length of the smallest side in it is not less than sixteen meters, and the area of the corners is not less than 360 square meters, provided that the length of the smallest side is not less than eighteen meters.

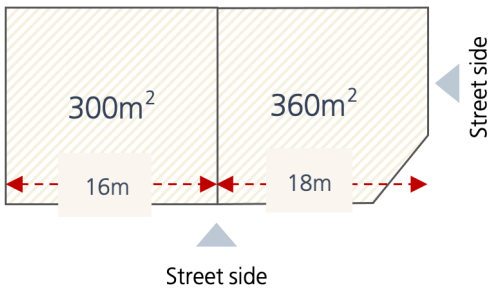


Lands overlooking two streets	Lands overlooking a street	
360	300	Minimum area for the plot
18	16	Length of the smallest side

2. Private Residential Areas "B" (RB): The plot of land is not less than 300 square meters, provided that the length of the smallest side in it is not less than sixteen meters, and the area of the corners is not less than 360 square meters, provided that the length of the smallest side is not less than eighteen meters.

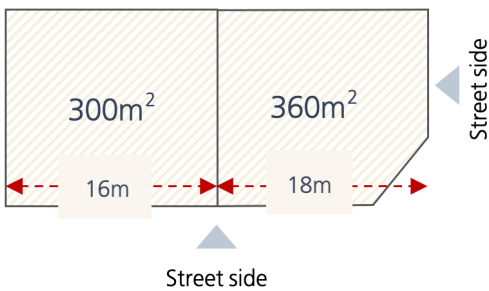


Lands overlooking two streets	Lands overlooking a street	
360	300	Minimum area for the plot
18	16	Length of the smallest side

3. Connected Residential Areas: "A" (RHA): The area of the plots of land is not less than 160 square meters, provided that the length of the smallest side is not less than 8 meters, and the area of corners is not less than 180 square meters, provided that the length of the smallest side is not less than 8 Meters.

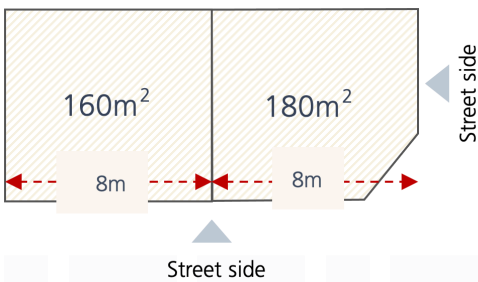


Lands overlooking two streets	Lands overlooking a street	
180	160	Minimum area for the plot
8	8	Length of the smallest side

4. Connected Residential Areas: "B" (RHB): The area of the plots of land is not less than 200 square meters, provided that the length of the smallest side is not less than 10 meters, and the area of corners is not less than 200 square meters, provided that the length of the smallest side is not less than 10 Meters.

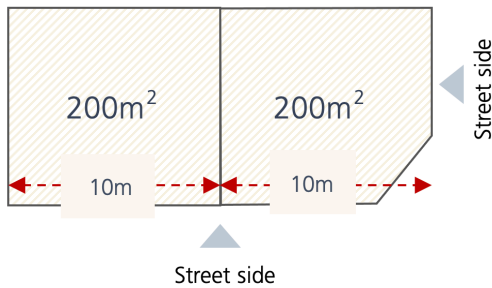


Lands overlooking two streets	Lands overlooking a street	Minimum area for the plot Length of the smallest side
200	200	
10	10	

5. Connected Residential Areas: "C" (RHC): The area of the plots of land is not less than 160 square meters, provided that the length of the smallest side is not less than 8 meters, and the area of corners is not less than 180 square meters, provided that the length of the smallest side is not less than 9 Meters.

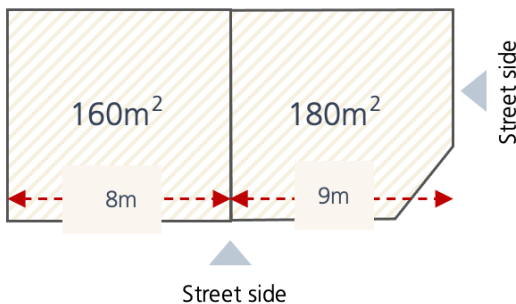


Lands overlooking two streets	Lands overlooking a street	Minimum area for the plot Length of the smallest side
180	160	
9	8	

6. Connected Building Areas (BR5): The area of the plots of land is not less than 600 square meters, provided that the length of the smallest side is not less than 20 meters, and the area of the corners is not less than 600 square meters, provided that the length of the smallest side is not less than 20 meters.

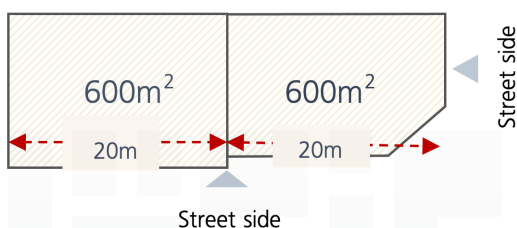


Lands overlooking two streets	Lands overlooking a street	Minimum area for the plot Length of the smallest side
600	600	
20	20	

7. Garden Residential Areas (RG): The area of the plots of land is not less than 1500 square meters, provided that the length of the smallest side is not less than 30 meters, and the area of the corners is not less than 1500 square meters, provided that the length of the smallest side is not less than 30 meters.

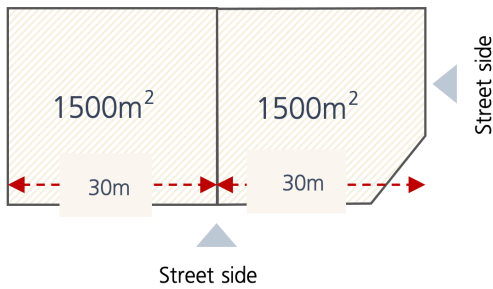


Lands overlooking two streets	Lands overlooking a street	
1500	1500	Minimum area for the plot
30	30	Length of the smallest side

8. Investment Buildings Areas "A" (BA): The area of the plots of land is not less than 2000 square meters, provided that the length of the smallest side is not less than 35 meters, and the area of the corners is not less than 2000 square meters, provided that the length of the smallest side is not less than 40 meters.

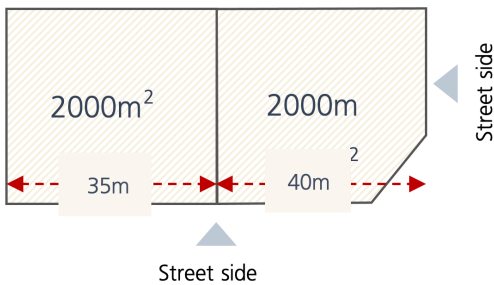


Lands overlooking two streets	Lands overlooking a street	
2000	2000	Minimum area for the plot
40	35	Length of the smallest side

9. Investment Buildings Areas "B" (BB): The area of the plots of land is not less than 1500 square meters, provided that the length of the smallest side is not less than 30 meters, and the area of the corners is not less than 1800 square meters, provided that the length of the smallest side is not less than 35 meters.

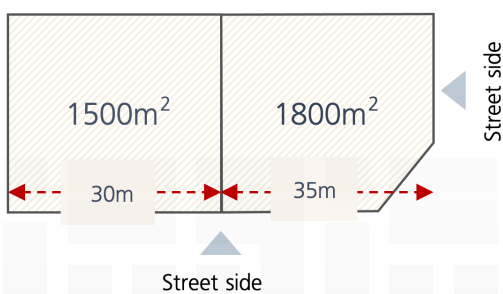


Lands overlooking two streets	Lands overlooking a street	
1800	1500	Minimum area for the plot
35	30	Length of the smallest side

10. Investment Buildings Areas "B1" (BB1): The area of the plots of land is not less than 1500 square meters, provided that the length of the smallest side is not less than 30 meters, and the area of the corners is not less than 1800 square meters, provided that the length of the smallest side is not less than 35 meters.

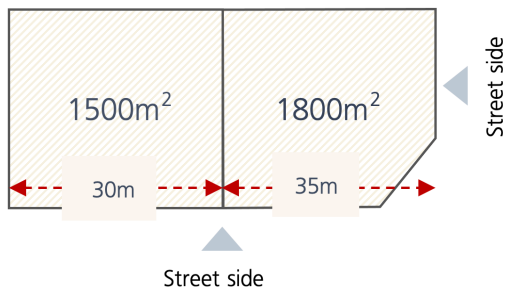


Lands overlooking two streets	Lands overlooking a street	
1800	1500	Minimum area for the plot
35	30	Length of the smallest side

11. Investment Buildings Areas "B2" (BB2): The area of the plots of land is not less than 1500 square meters, provided that the length of the smallest side is not less than 30 meters, and the area of the corners is not less than 1800 square meters, provided that the length of the smallest side is not less than 35 meters.

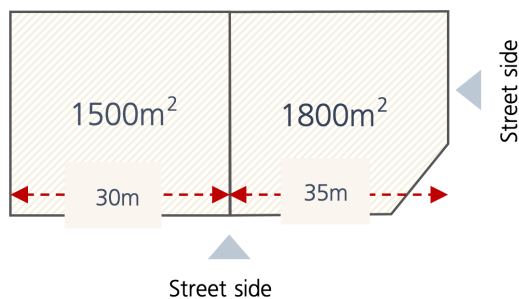


Lands overlooking two streets	Lands overlooking a street	
1800	1500	Minimum area for the plot
35	30	Length of the smallest side

12. Investment Buildings Areas "C" (BC): The area of the plots of land is not less than 1200 square meters, provided that the length of the smallest side is not less than 30 meters, and the area of the corners is not less than 1400 square meters, provided that the length of the smallest side is not less than 35 meters.

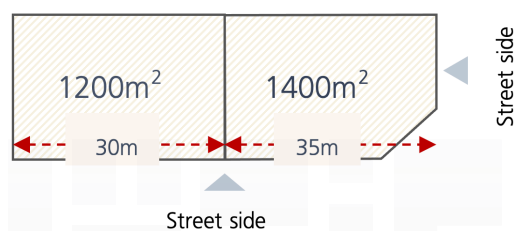


Lands overlooking two streets	Lands overlooking a street	
1400	1200	Minimum area for the plot
35	30	Length of the smallest side

13. Investment Buildings Areas "D" (BD): The area of the plots of land is not less than 800 square meters, provided that the length of the smallest side is not less than 22 meters, and the area of the corners is not less than 900 square meters, provided that the length of the smallest side is not less than 25 meters.

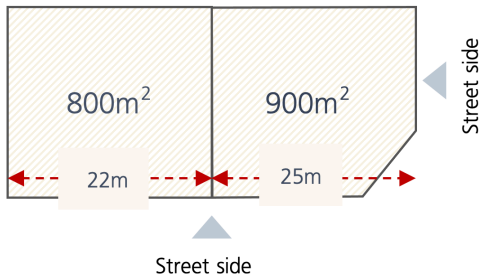


Lands overlooking two streets	Lands overlooking a street	
900	800	Minimum area for the plot
25	22	Length of the smallest side

14. Investment Buildings Areas "H" (BH): The area of the plots of land is not less than 600 square meters, provided that the length of the smallest side is not less than 20 meters, and the area of the corners is not less than 700 square meters, provided that the length of the smallest side is not less than 22 meters.

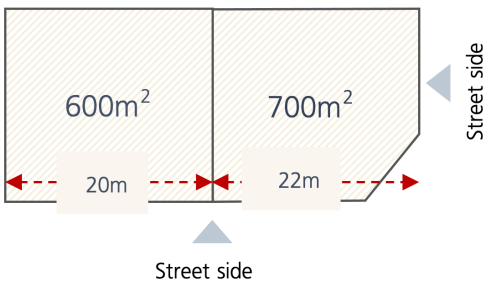


Lands overlooking two streets	Lands overlooking a street	
700	600	Minimum area for the plot
22	20	Length of the smallest side

15. Four-Story Building Areas (B4): The area of the plots of land is not less than 600 square meters, provided that the length of the smallest side is not less than 20 meters, and the area of the corners is not less than 700 square meters, provided that the length of the smallest side is not less than 22 meters.

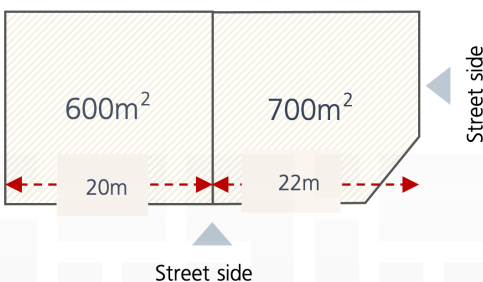


Lands overlooking two streets	Lands overlooking a street	
700	600	Minimum area for the plot
22	20	Length of the smallest side

16. Three-Story Building Areas (B3): The area of the plots of land is not less than 450 square meters, provided that the length of the smallest side is not less than 16 meters, and the area of the corners is not less than 500 square meters, provided that the length of the smallest side is not less than 18 meters.

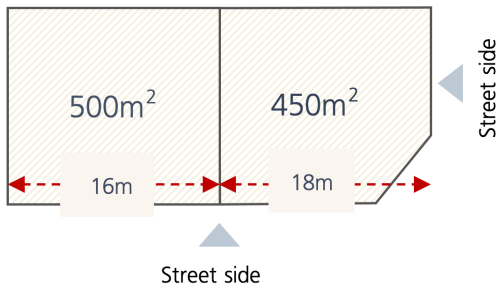

Lands overlooking two streets	Lands overlooking a street	
500	450	Minimum area for the plot
18	16	Length of the smallest side


17. Commercial Showroom Areas (COM): The area of plots of land is not less than 1000 square meters, provided that the length of the smallest side is not less than 25 meters, and the area of the corners is not less than 1200 square meters, provided that the length of the smallest side is not less than 30 meters.

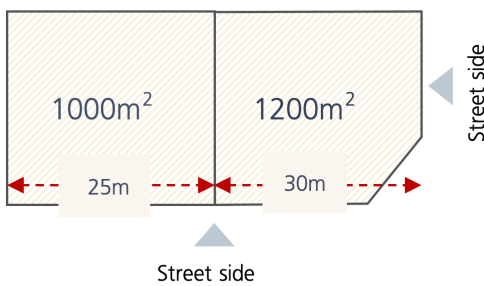

Lands overlooking two streets	Lands overlooking a street	
1200	1000	Minimum area for the plot
30	25	Length of the smallest side


18. The areas for **Industrial Manufacturing Projects** areas "A" and "B" are determined in coordination with the competent authorities.

19. Light Industries Areas (LD): The area of the plots of land is not less than 1000 square meters, provided that the length of the smallest side is not less than 25 meters, and the area of the corners is not less than 1200 square meters, provided that the length of the smallest side is not less than 30 meters.

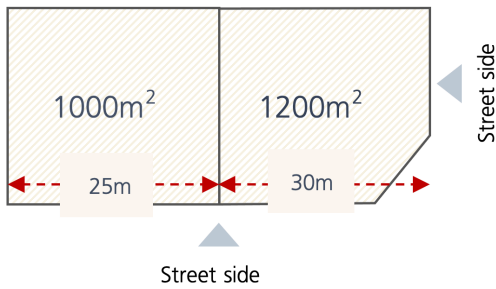


Lands overlooking two streets	Lands overlooking a street	Minimum area for the plot Length of the smallest side
1200	1000	
30	25	

20. Workshops and Maintenance Services Areas (WS): The area of the plots of land is not less than 450 square meters, provided that the length of the smallest side is not less than 18 meters, and the area of the corners is not less than 500 square meters, provided that the length of the smallest side is not less than 20 meters.

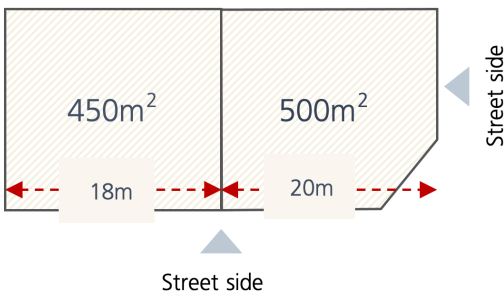


Lands overlooking two streets	Lands overlooking a street	Minimum area for the plot Length of the smallest side
500	450	
20	18	

21. Service Areas (S): The area of the plots of land is not less than 280 square meters, provided that the length of the smallest side is not less than 14 meters, and the area of the corners is not less than 300 square meters, provided that the length of the smallest side is not less than 16 meters.

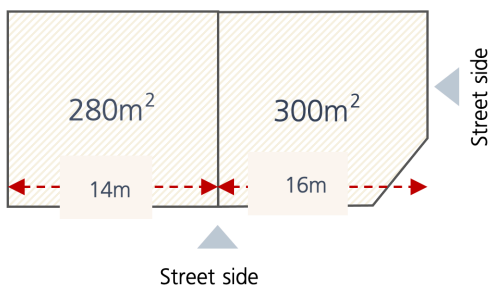

Lands overlooking two streets	Lands overlooking a street	Minimum area for the plot Length of the smallest side
300	280	
16	14	

22. Agricultural Areas (AG): The area of the plots of land is not less than 6000 square meters, provided that the length of the smallest side is not less than 50 meters, and the area of the corners is not less than 6000 square meters, provided that the length of the smallest side is not less than 50 meters.

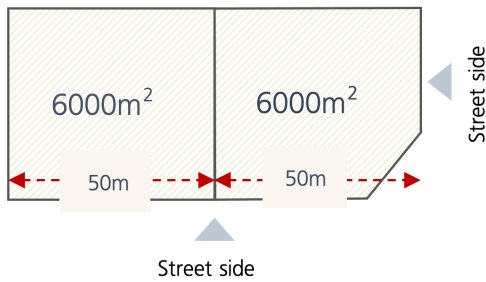

Lands overlooking two streets	Lands overlooking a street	
6000	6000	Minimum area for the plot
50	50	Length of the smallest side

23. The areas of the plots of land for **Housing Projects (MOH)** are determined according to what the authority deems fit for each project separately in coordination with the competent authorities as needed.


24. The areas of the plots of land for **Public Services and Utilities (PS)** are determined according to what the authority deems fit for each case separately, according to the technical and planning study, and in coordination with the competent authorities as needed.

25. The areas of plots of land for **Projects of a Special Nature (SP)** are determined according to what the authority deems fit for each case separately, according to the technical and planning study. It also requires submitting the matter to the Committee on Projects of a Special Nature.


5.2.2: The minimum land areas and side lengths specified in accordance with Article (13) of the Executive Regulations may be reduced by a maximum of 10%, after conducting the necessary planning and technical studies, and after the approval of the relevant authorities as needed.

5.3: The following standards are required for the various subdivision projects:

5.3.1: The subdivision of plots of land with large areas which exceed the prescribed approved areas, should observe the possibility of their division in the future.

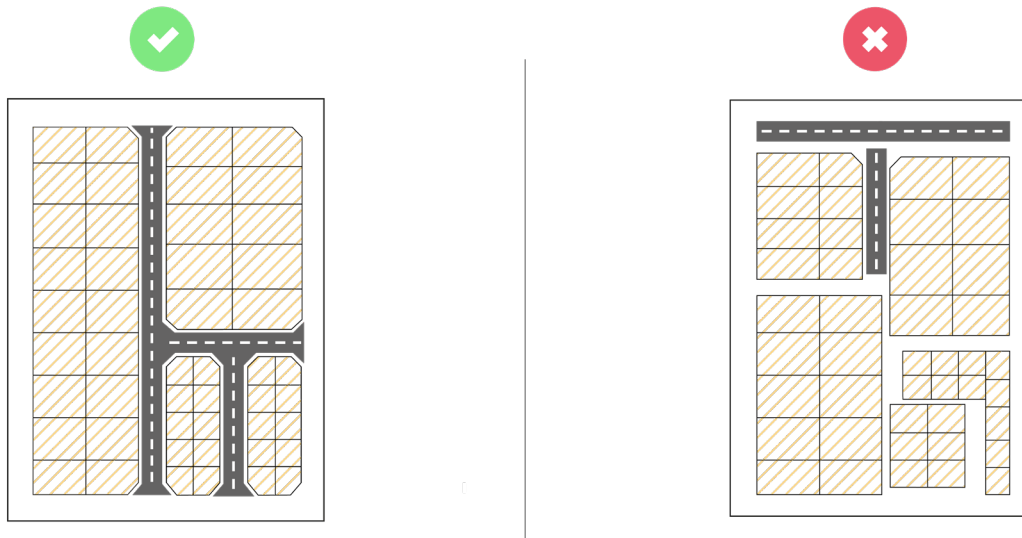


5.3.2: It is preferable that engineering standards be followed when preparing zoning plans so that the plots are regular in shape, perpendicular to the street, and have a uniform engineering character.

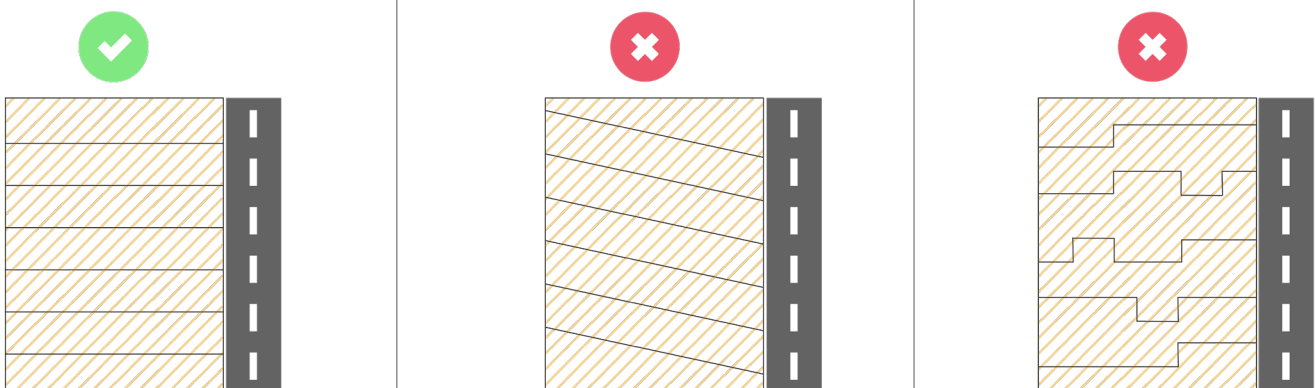

5.3.3: The minimum areas of the plots of land and side lengths listed in the Executive Regulation for the division of land shall be observed when dividing properties containing existing buildings, provided that the regulatory requirements for the construction are met according to their existing status for each plot of land resulting from the division.

5.3.4: It is necessary to adhere to the recessions of plots of lands in the event of existing facilities in accordance with Resolution No. (28) of 2009 issuing the Regulatory Requirements for Construction in the Various Areas of the Kingdom and amendments thereof. (example: Private Residential Area RA "A").

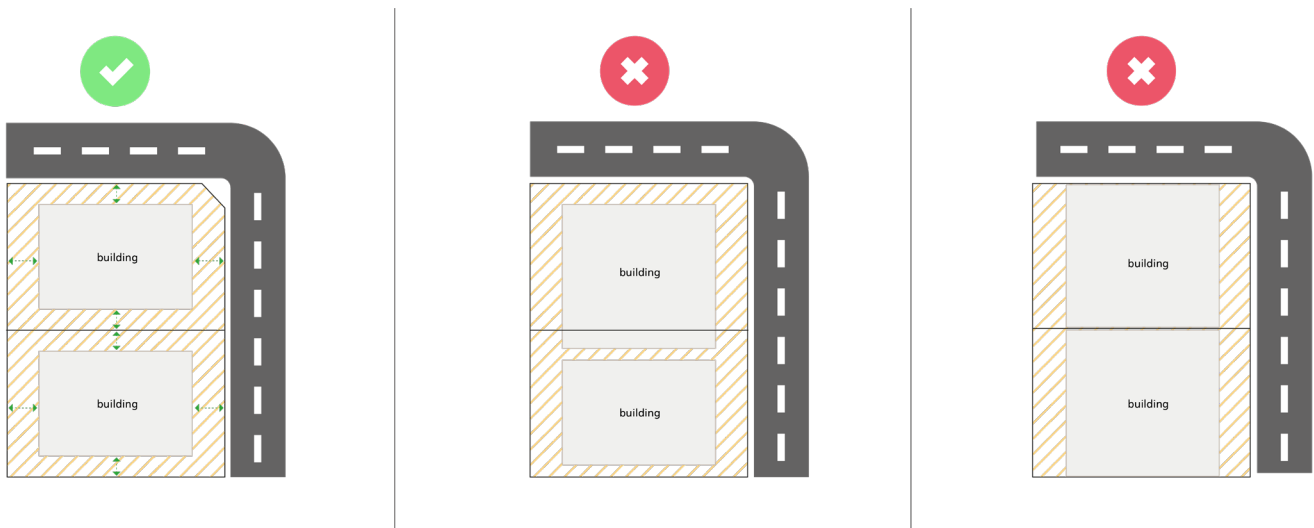

5.3.5: Free allocation of land and spaces for roads, squares, gardens, public parks and other public services, from the total area of the division land in accordance with Article (5) of Legislative Decree No. (3) of 1994 on the Division of Land Intended for Construction and Development. For planning considerations, the Authority may request the allocation of public utilities.

5.4: Submerged lands:

5.4.1: If the land proposed for subdivision is located within a submerged area, the applicant shall:

- Apply to the competent municipality to obtain a permit for the reclamation of the road leading to the land in addition to the land owned by the applicant.
- After obtaining the reclamation permit, the landowner shall carry out the reclamation work and then notify the competent municipality of the completion of the reclamation of the land which the applicant intends to divide in order to obtain a certificate of completion of the reclamation.
- The owner of the property applies to the Survey and Land Registration Bureau to request a land survey certificate valid for construction and development, which enables the applicant to submit a request to divide the land, according to Article 34 of Resolution No. 56 of 2009 issuing the Executive Regulations for Legislative Decree No. 3 of 1994 on the Division of Land Intended for Construction and Development.

Note: The Urban Planning and Development Authority (UPDA) may request the preparation of a hydrodynamic study for the submerged lands to be approved by the UPDA. The division shall be in accordance with the results of the study.

5.5: Requirements for Waterfront Areas:

The requirements and standards of the waterfronts shall be applied to all the lands requested to be zoned and directly overlooking the sea.

5.5.1: Uses:

Open waterfronts and public beaches shall be constructed including parks, green landscaping, and recreational, sporting and commercial facilities.

Restaurants, cafes, commercial and tourist activities, ports, and the necessary marine facilities shall be permitted, in accordance with the general plan for the development of the waterfront, after obtaining the necessary approvals from the concerned and competent authorities in this regard.


5.5.2: Building Percentages:

Table 1: Building Percentages for Waterfront Areas:

Uses	percentage
All built-up facilities and recreational, commercial and service facilities	Not more than 30%
Beaches, green landscaping, squares and playgrounds	Not less than 50%
Car parking	Not less than 20%
Additional commercial activities (one floor) when building a sandy beach only	%10


5.5.3: Heights:

- The height of the installations and buildings shall not be more than two stories, and a maximum of 10 meters.

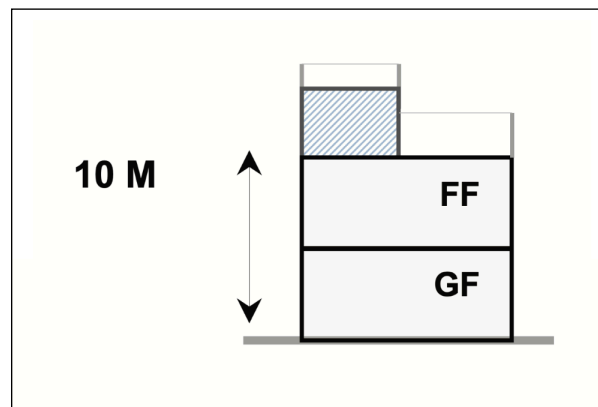

5.5.4: Recessions:

- The approved line for the reclamation is the front boundary of the property overlooking the waterfront, and the opposite side is the rear boundary. In the absence of an approved reclamation line, the front boundary shall be determined by the Urban Planning & Development Authority.
- All constructions and buildings shall recede by no less than 40 meters (forty meters) from the approved building line along the property.
- If the depth of the plot of land is less than 50 meters (fifty meters), the matter is submitted to the Urban Planning & Development Authority for study.
- Prayer facilities, service facilities, and toilets shall recede by no less than 4 meters (four meters) from commercial facilities, playgrounds, yards, and others.
- It is permitted to build a guard room, a room for pumps, stores, and sanitary and service facilities on the back border of the land and on one side only.

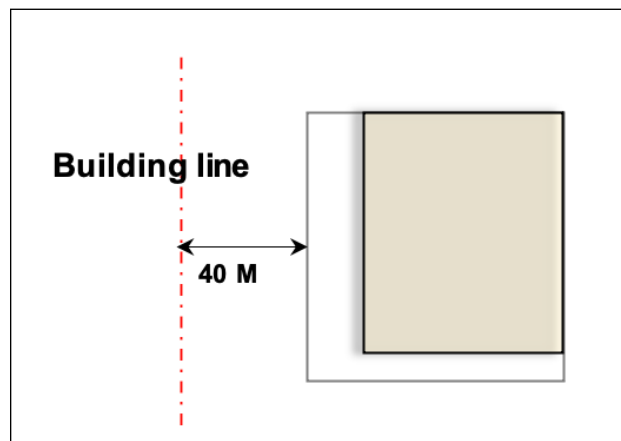

5.5.5: Special requirements :

Requirements for Swimming Beaches:

- The width of the beach must not be less than 25 meters (twenty-five meters), starting from the approved building line. Designated areas for sand playgrounds, children's playgrounds, and surveillance and security sites are permitted in the beach area.

- The width of the walkway should not be less than 10 meters (ten meters), starting from the rear boundary of the beach.
- Open green spaces shall be designated for beautification with a width of not less than 5 meters (five meters), starting from the rear border of the walkway.
- The depth of the outdoor sitting areas should not be more than 10 meters (ten meters).

If the site is not suitable for building a swimming beach, the following is required:

- Constructing an open seafront and a public walkway with a minimum width of 15 meters (15 meters), starting from the approved building line.
- Open green spaces shall be designated for beautification, children’s playgrounds and gardens with a width of not less than 25 meters (Twenty-five meters), starting from the rear border of the walkway.
- The outdoor seating areas shall not be more than 10 m (10 meters) deep, and two meters area on the sides for agriculture, landscaping, and lighting.

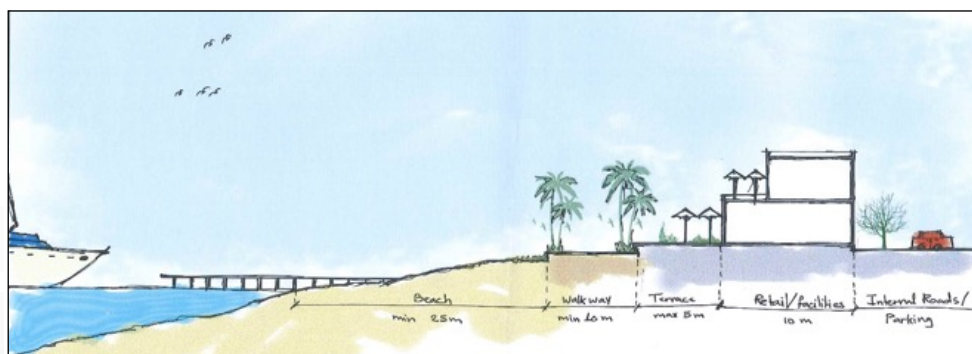


Table 2: Lands Areas Schedule/ Road Widths of Different Zoning: ²

No.	Zoning Types	Min. Road Widths (M)	Lands Overlooking One Road		Lands Overlooking Two Roads		Zoning Regulations For Construction		
			Min. Plot Area (M ²)	Min. Plot Elevation (M)	Min. Plot Area (M ²)	Min. Plot Elevation (M)	Max. Building Area (%)	Max. Building Height (M)	No. Of Floors Permitted
1	PRIVATE RESIDENTIAL (A) – (RA)	20	300	16	360	18	180	15	3
2	PRIVATE RESIDENTIAL (B) – (RB)	20	300	16	360	18	180	15	3
3	ROW HOUSING (A) – (RHA)	20	160	8	180	8	210	13	3
4	ROW HOUSING (B) – (RHB)	20	200	10	200	10	300	13	3
5	ROW HOUSING (C) – (RHC)	20	160	8	180	9	255	13	3
6	COMPOUND RESIDENTIAL – (RG)	20	1500	30	1500	30	55	10	2
7	INVESTMENT BUILDINGS (A) - (BA)	25	2000	35	2200	40	1200	-	-
8	INVESTMENT BUILDINGS (B) – (BB)	20	1500	30	1800	35	750	-	-
9	INVESTMENT BUILDINGS (B1) – (BB1)	20	1500	30	1800	35	750	-	-
10	INVESTMENT BUILDINGS (B2) – (BB2)	20	1500	30	1800	35	750	-	-
11	INVESTMENT BUILDINGS (C) – (BC)	20	1200	30	1400	35	500	50	10
12	INVESTMENT BUILDINGS (D) – (BD)	20	800	22	900	25	300	30	6
13	INVESTMENT BUILDINGS (H) – (BH)	20	600	20	700	22	300	-	-
14	BUILDINGS 4 STOREYS – (B4)	20	600	20	700	22	240	20	4
15	BUILDINGS 3 STOREYS – (B3)	20	450	16	500	18	180	15	3
16	ROW BUILDINGS (BR5)	20	600	20	600	20	500	22	5
17	COMMERCIAL SHOWROOMS - (COM)	20	1000	25	1200	30	300	25	5
18	INDUSTRIAL MANUFACTURING (A) – (DA)	TO BE DETERMINED IN COORDINATION WITH THE MINISTRY OF INDUSTRY & COMMERCE							
19	INDUSTRIAL MANUFACTURING (B) – (DB)								
20	LIGHT INDUSTRIES – (LD)	20	1000	25	1200	30	240	24	4
21	WORKSHOPS & MAINTENANCE – (WS)	20	450	18	500	20	240	24	4
23	SERVICE AREAS – (S)	20	280	14	300	16	180	18	3
	AGRICULTURE AREAS – (AG)	20	6000	50	6000	50	30	10	2

Section 2

Requirements of the Ministry of Works - Road Planning and Design Directorate

Table of contents

1. Definitions	40
<hr/>	
2. Technical Requirements and Standards of the Road Planning and Design Directorate at the Ministry of Works	43

1- Road Planning and Design Directorate Requirements

1.1: Definitions:

Right of way: the entire space (length and width) designated for public transportation, in addition to providing underground public service lanes, noting that the width is the full distance between the outer boundaries of the right of way.

Design Speed: the speed chosen for the design and the engineering characteristics of the road. It is the highest possible speed for private vehicles to travel safely on the road and in favorable weather conditions and low traffic density, provided that the engineering design characteristics of the road are the conditions controlling the safe speed on the road.

Access Management: Land access process must be managed so that appropriate access is provided for properties while maintaining a smooth flow of traffic along the surrounding road network in terms of capacity, speed and traffic safety. It is worth noting that the location, number and engineering design of the property access adjacent to any street are subject to the engineering standards and requirements and the type of the parallel streets. Providing accessibility shall depend on studying the land/lands to be accessed and the surrounding road network as a single system to achieve the desired goal, which is providing access to the property, and at the same time reduce conflicts between ingress and egress vehicles and the traffic movement of road users, including vehicles and pedestrians.

To allow access the following is required:

- 1) Studying the zoning of the road network according to the main function of each road, as the primary goal of controlled access highways is to transport the highest volume of traffic. While the main function of internal streets is to be able to reach properties instead of transferring traffic. Collector and distributor roads serve both property access and traffic movement.
- 2) Direct opening to higher-rated streets such as highways and arterial streets shall not be allowed, and restricting direct access to property on them whenever possible while providing access through lower-rated streets.

- 3) Locating signaled intersections to focus on traffic crossing the intersection. Signal-controlled intersections should be designed to facilitate coordination amongst them and the flow of the highest possible volume of traffic.
- 4) Limiting access to reduce interference with traffic movement. Entry roads and lanes should be away from intersections to reduce the likelihood of accidents and the impact on traffic movement and to provide appropriate turning lanes for vehicles through entrances.
- 5) Using middle islands with one sidewalk and limit access to it to organize access movement to properties and reduce impact on traffic movement.
- 6) Access control measures should apply to all roads, either the new roads on the network in the planning and design phase , or existing roads.

Motorway: The Motorway is on top of road hierarchy and classified as the highest road category. It is usually multi-lane and designed with the highest engineering standards in order to move traffic freely and at high speed. It includes continuous road shoulders along it, in addition to full access control (only merging lanes are allowed) and multi levels intersections.

Arterial Road: An arterial road is the lowest category of highways, and its primary function is to transport traffic among urban areas, making it difficult to allow direct access to it. Intersections in this type of road are either signal-controlled (urban areas) or multi-level (non-urban areas). It usually connects the collector to other arterial streets or highways.

Collector Road: a collector road is a low-to-moderate capacity road. It is designed to provide access to residential properties and to support the circulation of traffic in the road network, whether in urban areas (residential, commercial or industrial) or external rural areas. The collector road connects the local roads with the arterials.

Distributor Road: a distributor road has a lower capacity than a collector road. It is mainly designed to facilitate access to residential properties. Thus, together with the collectors, it is considered one of the most important roads in urban areas (residential, commercial or industrial).

Local Roads: a local road is at the bottom of road hierarchy and the lowest class of roads in terms of speed and capacity. It is intended for short trips only within the same area. Its primary function is to provide access to the lands surrounding the road.

Commercial Roads: a commercial road is designed to provide access to lands and parking lots in the shopping areas and lands within the commercial zoning.

Industrial Access Roads: an industrial access road is designed to provide access to lands falling within the industrial zoning, whether light or heavy industries of the Ministry of Industry, Commerce and Tourism.

The Safe Distance between Intersections: It is the safest permitted distance from an engineering point of view between intersections on the same road, so that it does not negatively affect the level of traffic safety for road users nor the flow of traffic on the road network while preserving the traffic engineering characteristics of the road such as the level of service, capacity, speed, travel time, delay, etc.

Dead-End Roads: a dead-end road has a dead end and unconnected or intersects with another street.

An adequate space must be provided to allow cars to turn when there are more than four housing units or the length of the (Cul-de-Sac) or dead-end road is (45 meters) or more.

1.2: Right of Way, the Safe Distance between Junctions and Road Access Standards:

Table 3: The widths for right of way differ according to their type. The following table shows standards for road accessibility:

#	Road Type	Speed Design (Km/h)	Right of Way	The least safe distance between junctions	Accessibility
1	Motorway	120 and higher	100 Meters and more	2.5 km and more	Unpermitted
2	Arterial	120 – 100	60 meters (two lanes) 70 meters (3 lanes) 100 meters (4 lanes)	1 km - 2 km	Unpermitted
3	Collector	100 – 70	40 meters (two lanes) 60 meters (3 lanes)	500 meters - 1 km	Unpermitted
4	Distributor	80 – 60	30 meters (two lanes) 15 meters (one lane) 20 meters (one lane with parking spaces)	200 meters - 500 meters	Unpermitted
5	Local Roads	50	15- 20 meters	50 meters at least	Permitted
6	Commercial Roads	50	20 meters	50 meters at least	Permitted
7	Industrial Access Roads	40	30 meters	30 meters at least	Permitted

1.3: Viewing Angles:

Viewing angles must be adhered to when dividing plots of land in the proposed division plan at intersections according to the following table:

Table 4: Viewing Angles

Right of Ways (m)		Viewing angles by type of intersection (m x m)		
Right of Way	Right of Way	Intersection (+)	Intersection (L)	Intersection (T)
15	12.5	10 x 10	10 x 10	5 x 5
15	15	10 x 10	10 x 10	7 x 7
20	15	15 x 15	15 x 15	10 x 10
20	20	20 x 20	20 x 20	15 x 15
25	25	20 x 20	20 x 20	15 x 15

Section 3

Requirements of the Ministry of Works - Sanitary Engineering Planning & Projects Directorate

Table of contents

1. Definitions	47

2. Technical Requirements and Standards of the Sanitary Engineering Planning & Projects Directorate at the Ministry of Works	48

1- Requirements of the Sanitary Engineering Planning & Projects Directorate

1.1: Definitions:

Sewerage Drainage System: facilities and works related to sewage water drainage and the associated waste materials, including pipe networks, auxiliary devices and installations.

Manholes: Usually hermetic manholes are built of regular or reinforced concrete along the lines of the network to monitor their work, repair when necessary and clean them in the event of clogging, and they can be of a square, rectangular or circular shape. Their depth varies according to their location in the network. They must have adequate dimensions to facilitate maintenance work.

Pumping or Lift Stations: Facilities including pumps and equipment to pump and transport sewage to treatment sites.

Control Panels: A structure referring to the operations, control and wastewater removal status of pumping stations.

1.2: Areas to which the provisions of the Manual apply:

1.2.1: Areas served by the public sewerage network.

1.2.2: Areas within the sanitation sector projects, for building sewerage networks, whose detailed designs have been completed.

1.3: Areas and plans where the provisions of the Guide do not apply:

1.3.1: Major investment projects, such as Amwaj, Diyar Al Muharraq, Durrat Al Bahrain, Durrat Marina,, etc.

1.3.2: Projects of the Ministry of Housing.

1.3.3: Social housing projects.

1.3.4: Areas in the planning stage, as the responsibility for determining the needs of the sanitation sector in these areas rests with the sanitation sector.

1.4: Procedures followed to determine the needs of the sanitation sector:

In order to meet the future needs of the sanitation sector, the sector works to reserve plots of land, in the areas and plans to which the provisions of this Manual apply to build sewerage networks to serve these plans, and the following are the applicable procedures to determine the sizes and locations of the lands.

1.4.1: Site requirements for main stations and control panel:

Site requirements for main stations:

- Residential areas should be avoided as much as possible, or if possible, building the station in a place designated for the Service Block.
- The station's location must overlook an open street having a width of at least 6 meters.) If the location is not available on an open street, a special crossing (lane) at the station should be provided not less than 6 meters wide.

Site requirements for control panels:

- Residential areas should be avoided as much as possible, or if possible, the control panel should be placed in designated area for the Service Block.
- Placing the control panel on the building's façade should be avoided.
- The location should have access to the public road.
- The site of the control panel must have access to the public road having a width of at least 6 meters.) If the location is not available within an access to the public road, and corridor of at least 6 meters wide must be provided. A special crossing (lane) at the station should be provided not less than 6 meters wide.

1.4.2: Protection requirements for stations and control panels:

Protection requirements for main stations:

- A distance (recession) of not less than 3 meters must be maintained between the proposed plot allocated to the main station and other real estates..

Protection requirements for control panels:

- A distance (recession) of not less than 1.5 meters must be maintained between the proposed plot allocated the control panel and other real estates.

Table 5: Sizes of plots of lands for control panels:

Control panels shall be provided for all types of stations as they are necessary to control the pumps in the stations.

S	Control Panel	Required sizes for the plots of lands (meter) ²
1	Control panel for pumping stations	2 x 5 (Minimum)
2	Control panel for lifting stations	2 x 4 (Minimum)

Table 6: Sizes of plots of lands for main stations:

#	Station type	Peak flow	Required sizes for the plots of lands (meter) ²
1	Lifting sub-station	From 100 liters/second to 180 liters/second	15 x 15
2	Lifting sub-station	200liters/second or more	22 x 15
3	Pumping sub-station	liters/second or 200 more	25 x 15
4	Mobile Sewerage Treatment Plant (STP)	500 (meters ³ / per day)	50 x 50
5	Mobile Sewerage Treatment Plant (MBR Type)– (STP)	500 (meters ³)	30 x 30

Note: To determine what type of plant is required, the (Peak Flow: PF) is calculated via calculating the volume of daily peak flows as stated in Table 7 below.

1.5: The required information to determine the land sites:

1.5.1: The proposed connection point to the existing sewerage network, which must be obtained from the Sanitary Engineering Planning and Projects Directorate.

1.5.2: Levels of proposed roads to be obtained from the Roads Planning and Design Directorate.

Table 7: Steps of the mechanism for locating land for pumping or lifting stations:

	Method for calculating the required size of pumping and lifting stations
1	<p>Visiting the required site and carrying out surveying works to determine the topography of the land, the existing sewerage networks and their depths and compare them with engineering maps according to the port (As-built drawings), to identify connection point.</p> <p>It is necessary to perform survey work for the lands to be connected to the sewerage network.</p>
2	<p>Initial designs shall be prepared as follows:</p> <ol style="list-style-type: none"> 1- If 10 houses are connected, 200mm diameter pipes (tilt ratio 60:1) are used. 2- If 11-25 houses are connected, 200mm diameter pipes (pipe gradient 1:80) are used. 3- If 26-60 houses are connected, 200mm diameter pipes (pipe gradient 1:90) are used.

3	<p>If more than 60 houses are connected, the population density is calculated as follows:</p> <ul style="list-style-type: none"> • Population density = number of people x number of housing units • Note: <ul style="list-style-type: none"> - A number of seven (7) people are calculated as the average of one housing unit (house). - A number of 5 people are calculated as an average for one apartment. <p>Example: Requirement: Connecting a residential building consisting of 3 floors, and each floor contains 4 apartments.</p> <p>Population density = number of people x number of housing units Population density = $5 * 4 * 3 = 60$ people</p>
4	Calculation of consumption rate per capita = 240 liters/person
5	Calculation of the leakage amount = 80 liters/person
6	<p>Calculating design factor at peak time.</p> <p>P = No. of Population Density.</p> $(DPF) = (1.5765 \times 10^{x7}/P)^{x0.158}$
7	<p>Calculating the flow quantity for the design during the peak time (PDF):</p> $DPF (L/s) = ((P \times 240 \times DPF) + (P \times 80)) / 86400$
8	<p>Sewage pipe diameter:</p> <p>Design flow quantity = Q</p> <p>(D) = The diameter of the pipe in meters.</p>

Optimum velocity (for lines designed according to the gravity system) = 0.9 m/s.

Optimum velocity (for high pressure designed lines) =

1- 1.25 m/s minimum.

2- 1.5 m/s maximum

To calculate the diameter = the equation to be used

$$Q = A \times V$$

$$A = Q/V \text{ (Is this formula correct)}$$

$$Q = (D^2 / 4) \times V$$

$$D^2 = (Q \times 4) / V \text{ (Is this formula correct)}$$

Pipe diameter size:

- D = 2.4m minimum inner diameter.
- D = 3.2m minimum inner diameter.

Consider A: Area of the wet well (the sump of the pumping station) in (M)²

Considering that V= Velocity for Gravity Line where it will be taken as an optimum Velocity to be 0.9 m/sec

Considering that V= Velocity for pressure Line where it will be taken as an optimum Velocity to be:

- Minimum (V) : 1.25m/sec
- Maximum (V) : 1.5m/sec

9	<p>Finding pipe size and gradient using a hydraulic flow chart or hydraulic design table. The table below shows pipe size and gradient if the number of housing units is less than or equal to 60 units.</p> <p>The following table indicates the nominal gradients for housing units on the assumption that there are 6 persons per unit. Pipe of 200 mm diameter will be used.</p> <table border="1" data-bbox="590 649 1141 817"> <thead> <tr> <th>No. Housing Units</th> <th>Minimum Gradient</th> </tr> </thead> <tbody> <tr> <td>1-10</td> <td>1:60</td> </tr> <tr> <td>11-25</td> <td>1:80</td> </tr> <tr> <td>26-60</td> <td>1:90</td> </tr> </tbody> </table> <p>If the number of units is more than 60 units, pipe size and gradient will be determined by using the hydraulic flow chart or hydraulic design table.</p>	No. Housing Units	Minimum Gradient	1-10	1:60	11-25	1:80	26-60	1:90
No. Housing Units	Minimum Gradient								
1-10	1:60								
11-25	1:80								
26-60	1:90								
<p>Method for calculating the flow volumes at the lifting or pumping station entry</p>									
1	<p>Daily peak flow factor calculation</p> $(PF) = ((3.75 \times (10)^7) / P) 0.078$ <p>Please be informed regarding the following:</p> <p style="text-align: right;">PF: Peak Factor</p> <p style="text-align: right;">P: is the No. of Population Density</p>								

2	<p>Calculating flow volume at daily peak time</p> <p>PF: Peak Flow</p> <p>(PF)</p> <p>$DF (L/s) = ((P \times 240 \times \text{Daily PF}) + (P \times 80))/86400$</p>
3	<p>Calculating the diameter for the catch basin of the station as follows:</p> <p>Pipe diameter in meter = (D)</p> <p>Optimum velocity (for lines designed according to gravity system) = 0.9m/</p> <p>Optimum velocity (for high pressure designed lines) =</p> <p style="margin-left: 20px;">1- 1.25 m/s minimum.</p> <p style="margin-left: 20px;">2- 1.5 m/s maximum</p> <p>$Q=A * V$</p> <p>$Q = (\pi (D^2 /4)) * V$</p>
4	<p><u>Calculating the size of the pump basin:</u></p> <ul style="list-style-type: none"> • Assuming time (t) to operate the station = 2 minutes • The unit of calculation of flow quantity (Q) = m³/s • (D) = 2.4 m minimum pipe diameter (pipe diameter varies by flow quantity). • (D) = 3.2 m maximum pipe diameter (pipe diameter varies by flow quantity). • (V) = Size in cubic meters • H = Height in meters • (A) = The area in square meters • Equations which shall be used: • $V = Q \times t$ • $A \times h = Q \times t$
Bahrain design guidelines and standards are mostly based on British Standards (BS).	

Section 4

Requirements of the Ministry
of Municipalities affairs and
Agriculture -Agriculture
Engineering & Water Resources
Directorate

Table of contents

1. Technical Requirements and Standards of the Agriculture Engineering & Water Resources Directorate at the Municipalities affairs and Agriculture	57
--	----

1- Requirements of the Agriculture Engineering & Water Resources Directorate:

The request is studied to ascertain that there is an agricultural drainage network, treated sewage water network, underground wells, or palm trees within the boundaries of the property or neighboring properties, in addition to the existence of future projects related to the f Agriculture Engineering and Water Resources Directorate.

If there are existing services:

1.1: An application must be submitted to the Agriculture Engineering and Water Resources Directorate with the following documents attached:

- 1.1.1: Copy of the title deed.
- 1.1.2: A recent land survey certificate.
- 1.1.3: Engineering maps issued by a certified engineering office in (AutoCAD & PDF) format.
- 1.1.4: Applicant's smart card or passport copy.
- 1.1.5: A copy of the certified power of attorney for the person acting on behalf of the applicant.

1.2: Requirements for completion of procedures:

1.2.1: In case of groundwater wells, the wells shall be closed under the supervision of the Agriculture Engineering and Water Resources Directorate by one of the contractors approved by the aforementioned Directorate. The applicant shall bear the costs.

1.2.2: If the treated wastewater network is affected, the network must be transferred or canceled under the supervision of the Agriculture Engineering and Water Resources Directorate by one of the contractors approved by the aforementioned Directorate. The applicant shall bear the costs.

1.2.3: If the agricultural drainage networks are affected, the network path must be diverted or changed from open to closed network or canceled under the supervision of the Agriculture Engineering and Water Resources Directorate by one of the contractors approved by the aforementioned Directorate. The applicant shall bear the costs.

1.2.4: If there are date palm trees, the applicant must replant them in the places designated for them. The applicant shall bear the costs.

1.2.5: The applicant must provide a new route for the affected existing services within the property itself, in case it is not possible to divert the network route within the services corridor outside the property.

1.3: General Notes:

1.3.1: All affected services to be protected by approved contractor under the supervision of the Agriculture Engineering and Water Resources Directorate. The applicant shall bear the costs.

1.3.2: None of the existing services shall be canceled without the approval of the competent committee, and the Directorate has the right to reject the request.

Section 5

Requirements of the Electricity and Water Authority - Electricity Distribution Directorate

Table of contents

1. Technical Requirements and Standards of the Electricity Distribution Directorate, Electricity and Water Authority	61
---	----

1 - Requirements of the Electricity Distribution Directorate

1.1: The amount of electricity required:

The request shall be studied to calculate the electrical loads required to be connected to the divided plots of land according to needs. The required electrical loads are calculated to determine the number of sub or main electricity stations to be allocated according to the following:

(A) Provision of the electrical loads required by the applicant for land division according to Table No. 8.

(B) Provision of information for each zone as follows:

- The total area of land plots.
- The number of plots of land after the subdivision.
- The total building area of plots of land.
- The width and area of streets within the plan.

If the total electrical loads are more than 12,000 KVA, a main power station must be provided, according to the requirements for providing the main stations mentioned in Table No. 10.

Table 8: Equations required to calculate the amount of electricity required to be connected to the divided plots:

Property type	Electrical load calculation factor (kVA / m ²)
Private Residential "A" (RA)	0.18
Private Residential "B" (RB)	0.22
Garden Residential (RG)	0.17
Connected Residential "A" (RHA)	0.18
Connected Residential "B" (RHB)	0.22
Connected Residential "C" (RHC)	0.22

Property type	Electrical load calculation factor (kVA / m2)
Three-Story Buildings (B3)	0.30
Three-Story Buildings with retail façade (B3*)	0.35
Four-Story Buildings (B4)	0.35
Four-Story Buildings with retail façade (B4*)	0.40
Investment Buildings “A” (BA)	1.35
Investment Buildings “B” (BB)	1.40
Investment Buildings “B1” (BB1)	1.40
Investment Buildings “B2” (BB2)	1.40
Investment Buildings “C” (BC)	1.45
Investment Buildings “D” (BD)	1.50
Agricultural Areas (AG)	0.05
Light Industries (LD)	0.20
Service Areas (S)	0.37
Workshops and Maintenance Services Areas (WS):	0.40
Commercial Showrooms (COM)	0.30
Commercial Showrooms 1 (COM1)	0.30
Special Nature Projects (SP)	The nearest classification factor shall be applied according to uses approved by the Urban Planning and Development Authority

Table 9: Example of calculating the amount of electricity required for a land subdivision draft:

Property Type	Land (m ²) area	Electrical load calculation factor (kVA/m ²)	Maximum electrical load required (kVA) (Property area x voltage calculation factor)
Private Residential "A" (RA)	315	0.18	57 = (0.18 x 315)
Private Residential "B" (RB)	400	0.22	88 = (0.22 x 400)
Three-Story Buildings (B3)	600	0.30	180 = (0.30 x 600)

1.2: Sizes of Electrical Substations:

If there is a need to allocate lands for the electrical substations based on the above-mentioned requirements, the measurements of the substations must be adhered to according to the following table:

Table 10: Sizes of Electrical Substations:

S	Station size (m x m)	Station type	
		Station door	Station capacity
1	8.5 x 6.5	Door on longest side	1 TX – 1000 KVA
2	7.0 x 9.0	Door on shortest side	1 TX – 1000 KVA
3	9.0 x 7.0	Door on longest side	1 TX – 1500 KVA
4	7.0 x 9.5	Door on shortest side	1 TX – 1500 KVA
5	13.0 x 7.5	Door on longest side	2 TX – 1000 KVA
6	9.0 x 14.0	Door on shortest side	2 TX – 1000/1500 KVA
7	14.0 x 8.0	Door on longest side	2 TX – 1500 KVA
8	15.0 x 8.0	Door on longest side	3 TX – 1000 KVA
9	16.0 x 8.0	Door on longest side	3 TX – 1500 KVA
10	20.0 x 8.0	Door on longest side	TX – 4 1500 KVA

1.3: If there are existing services:

Sometimes there are connections for electricity within the properties requested to be divided. In this case the service must be disconnected or transferred in coordination with the Electricity Distribution Directorate through one of the contractors approved by the aforementioned Directorate, and the applicant bears the costs, or leaving adequate recessions to ensure that services are not affected.

1.4: General Notes:

1.4.1: The sizes and measurements of some substations may be approved despite their irregularity, subject to the approval of the Electricity Distribution Directorate.

1.4.2: The garbage collection sites to not be allocated near to the proposed Substations plots.

1.4.3: Any existing or temporary installations on the sites designated for substations must be removed.

1.4.4: Electricity Substations must face a road or a lane not less than 5 meters wide.

1.4.5: The Electricity Distribution Directorate shall have the right to re-estimate / re-calculate the required electrical load and determine the number of electricity substations required to be supplied in addition to their location.

1.4.6: The substation requirement shall be calculated as per the load allocation per plot. According to the load allocation, the number of services which can be connected per feeder shall be determined vide below table.

Sr. No.	Ultimate Load (in kVA)	Service Cable size (mm ²)	Service Cut-out size (Amp)	Number of services per feeder
1	1 - 40	4C x 25	60	5
2	41 - 70	4C x 70	100	3
3	71 - 100	4C x 120	160	2
4	101 - 170	4C x 240	250	1
5	171 - 340	2 * 4C x 240	500	1
6	➤ 341 kVA	Substation	ACB	-

1.4.7: The location and sizes of substations shall be determined viewing the loading policy and also available corridor. For Road width 12.5m & 15.0m, EDD is assigned 1.0m corridor on both sides of the road. Only 4 LV cables and/or 3 11kV cables shall be proposed in 1.0m corridor..

1.4.8: The location and sizes of substations shall be determined viewing the maximum length of LV cables (400 V) to the last plot to be supplied should not exceed 300 m.

1.4.9: The total load requirement for the entire project shall be calculated as a summation of load for individual plots. Primary substation requirement shall be as per the Ministerial rule 13/2006.

Section 6

Requirements of the Electricity and Water Authority - Water Distribution Directorate

Table of contents

1. Technical Requirements and Standards of the Water Distribution Directorate, Electricity and Water Authority	68
--	----

1- Requirements of the Water Distribution Directorate

1.1: The amount of water required

The request shall be studied to calculate the water demand required to be delivered to the subdivided plots of the land according to needs. The amount is calculated using one of the two options mentioned below:

A) Provision of the water demand required by the applicant for the whole land subdivision according to Table No. 11..

(B) Based on information for each zone as follows:

- The total area of land plots.
- The number of plots of land after the division.
- The total built-up area of plots of land.

1.2: Allocation of sites for water stations:

The Planning and Studies Directorate shall be consulted internally to ensure the availability of water resources to be delivered to the divided plots of land. If there are no water sources for transmission and distribution, a plot of land must be allocated within the proposed division according to the measurements and areas mentioned in section seven on the requirements of the Planning and Studies Directorate.

1.3: If there are existing services:

Sometimes there are water connections within the properties requested to be divided. In this case the service must be disconnected or transferred in coordination with the Water Distribution Directorate through one of the contractors approved by the aforementioned Directorate, and the applicant bears the costs.

1.4: General Notes:

1.4.1: The standards used in designing water distribution network system must basically comply with the standards and guidelines issued by the Electricity and Water Authority in the Kingdom of Bahrain (Water Distribution Directorate), which are as follows:

- Measured Term Contract (MTC) issued by the Electricity and Water Authority.
- Technical guidelines for internal plumbing systems issued by the Electricity and Water Conservation Directorate at the Electricity and Water Authority.

1.4.2: Water services will be connected after the construction of the new water distribution tank is completed.

1.4.3: All terms and conditions of the Water Distribution Directorate shall apply.

1.4.4 Water Distribution Directorate shall determine the recession required for pipelines close to the proposed land division. .

1.4.5: MoU might be required and to be signed by the landowner /developer and EWA when decided by concerned directorate.

1.4.6: Commitment to the Buildings Internal Water Plumbings along with the Water Meter Fixing Guidance.

Table 11: Standard Rates for Water Consumption for various Uses:

S	Usage	In liters	Details
1	Villas	350	Per person/per day (6 persons/villa)
2	Flats	220	Per person/per day (4 persons/flat)
3	Hotels	275	Per bed/per day, including kitchen and cleaning uses
4	Staff	35	Per person per day (office premises from 6 to 8 hours)
5	School students	15	Per person per day
6	Technical school students	20	Per person per day
7	Hospitals	455	For each bed, including staff and other uses
8	Hospital visitors/health	10	If visitors spend more than two hours
9	Office visitors	5	If visitors spend one to two hours
10	Worker camps	180	Per person per day
11	Youth hostels/student camps	180	Per student per day
12	Restaurants	50	Per square meter (dining hall/sitting area)/ per day
13	Grass/shrub area	11	Per square meter/per day
14	Small plants covered by earth	11	Per square meter/per day
15	Medium plants/trees	11	Per plant/per day
16	Mosques	15	Per mosque/per day
17	Car wash (manual)	100	Per car/per day
18	Hydraulic Car Washing Lift	2727	Per lift/per day
19	Car wash (automatic)	21,000	Per station/per day
20	Laundry	10	Per kilogram (clothes)
21	Public market	7	Per square meter (shop area only)/per day
22	Beauty salon	1,500	Per unit/per day
23	Club (excluding the stadium)	35,000	Per club/per day
24	Livestock	50	Per head/per day
25	Movie house	30	Per seat/per day (if in a separate complex)
26	substation	35	One person per substation/per day
27	Shopping center/commercial office	50	Per person per da
28	Marina	200	Per boat/per day
29	Airport	30	Per passenger/per day

Section 7

Requirements of the Electricity and Water Authority - Planning and Studies Directorate

Table of contents

1. Technical Requirements and Standards of the Planning and Studies Directorate, Electricity and Water Authority	73
--	----

1- Requirements of the Planning and Studies Directorate

1.1: Water Stations:

The request is studied to ensure that the sites of the water stations for forwarding, storing, and distributing water are available in the detailed plan for the area. If site for a forwarding, storing and distributing station is not available, the allocation of a plot of land within the plan is requested according to the measurements and areas mentioned in the attached table below.

Table 12: Water stations measurements:

S	Type of station required	Measurements (m x m)	Notes
1	Water Forwarding Stations	700 x 700	It should be near the water production plant and facing more than one street
2	Water Storage, Forwarding and Distribution Stations	150 x 150	The site is determined by the Planning and Studies Directorate based on the master plan for housing, commercial and industrial projects
3	Water distribution stations (water towers)	75 x 75	The site is determined by the Planning and Studies Directorate based on the master plan for housing, commercial and industrial projects

1.2: Water Transmission Corridors:

Table 13: Measurements of main corridors for water transmission

S	Road width	Number of required corridors	Notes
1	Road width is 100-120 meters	2x6 m (one corridor on each side)	- Water transmission corridors should be outside the roads, preferably on the verge.
2	Road width is 60 meters	2x5 m (one corridor on each side)	
3	Road width is 30-40 meters	One corridor with a width of 5 m (On any side)	
4	Road width is 10-25 meters	One corridor with a width of 4 m (When needed to connect water stations to the network)	- other services shall not be share with water transmission corridors. -water transmission corridors shall not be in private lands or properties, and to be at ground level and reclaimed to the final ground level. - The requirements of corridors are to be reviewed based on demand on a case-by-case.

1.3: Electricity Transmission Substations availability:

The request is studied to ensure the availability of the electricity transmission substations near the detailed plan of the area. If resources to connect the electricity transmission are not available, a plot of land within the plan shall be allocated according to the measurements and areas mentioned in the attached table below.

Table 14: Electricity Transmission Substations measurements:

s	Type of station required	measurements (m x m)	Notes
1	66 kV / 11 kV	60 x 60	Substation capacity 48 MVA
2	132 kV / 22 kV Or 132 kV / 11 kV	60 x 60	Substation capacity 120 MVA
3	220 kV / 66 kV	120 x 120	Substation capacity 360 MVA
4	400 kV / 132 kV	130 x 130	Substation capacity 360 MVA

1.4: Electricity transmission corridors :

Table 15: Measurements of main corridors for electric power transmission:

S	Road width	Number of required corridors	Notes
1	Road width is 100-120 meters	4x2 m (4 m center to center clearance between corridors)	- Electricity transmission corridors should be outside the roads, preferably on the sidewalks. - Other services shall not encroach the electricity transmission corridors.
2	Road width is 60 meters	3x2 m (4 m center to center clearance between corridors)	
3	Road width is 30-40 meters	2x2 m (4 m center to center clearance between corridors)	-Electricity transmission corridors shall not be in private lands or properties, and shall be at ground level and buried to the final level.
4	Road width is 10-25 meters	One corridor with a width of 2 m (When needed to connect electricity transmission substations to the existing transmission network)	- The need for corridors is reviewed on demand on a case-by-case basis.

1.5: General Notes:

1.5.1: If there is no Water Station or electricity Primary Substation, the appropriate land must be provided within the zoning plan.

1.5.2: If there is a Water Station or electricity Primary Substation in the detailed plan of the area, but it is not sufficient for the water supply or required electricity loads, the appropriate land must be provided within the zoning plan.

1.5.3: The Planning and Studies Directorate of the Electricity and Water Authority shall decide the required horizontal clearances for existing and future water transmission pipelines and electricity transmission cables near the plan.

1.5.4: The sizes and measurements of some stations may be approved despite their irregularity, subject to the approval of the Planning and Studies Directorate of the Electricity and Water Authority.

1.5.5: Any existing or temporary installations on the sites allocated for the main Water Station and electricity transmission Substation must be removed.

1.5.6: The Planning and Studies Directorate of the Electricity and Water Authority has the right to recalculate the amount of water supply and electricity loads require, to determine the number of main Water Station and electricity transmission Substation to be provided, in addition to specifying their locations.

1.5.7: Provision of corridors required to install Water Transmission Pipelines and to lay electricity and water transmission cables, as shown in (1.1) and (1.2) above.

1.5.8 There may be a need to sign a memorandum of understanding between the developer and the Electricity and Water Authority in order to specify all requirements for the developer and the Electricity and Water Authority.

Section 8

Requirements of the Telecommunications Regulatory Authority

Table of contents

1. Technical Requirements and Standards of the Telecommunication Regulatory Authority	79
---	----

1- Requirements of the Telecommunications Regulatory Authority

1.1: If there are existing services:

1. The request is studied to ascertain whether there is an impact on the terrestrial telecommunication services with the proposed zoning, as it can be avoided in the event that those services remain within the proposed roadway in the zoning project.
2. An alternate service corridor of 1 meter width shall be provided to divert existing telecommunication services. If these services are affected, the diversion of telecommunication network is required under the supervision of BNET.

1.2: If there are no existing services:

Communications service corridors of one meter wide shall be provided in the footpath, and if a 1-meter-wide communications service corridor cannot be allocated, the developer should coordinate with the Central Planning Office at the Ministry of Works to provide possible solutions - such as the possibility of utilizing parts of adjacent service corridors to set up ground communications rooms - and send them to the Telecommunications Regulatory Authority for review and approval.

1.3: Allocation of sites for telecommunication towers:

The request is studied to ascertain whether the area within the zoning proposal is covered by wireless telecommunication services. If the area is not covered, a site within the plan is allocated to telecommunication towers to be determined by the Telecommunications Regulatory Authority when circulating the zoning proposal to the various service agencies, as attached in the standards for allocating sites to telecommunication towers as follows:

- The land should measure 10 x 10 meters.
- The land must not be located in the middle of the plot of land.
- It is preferable to allocate a land near public services.
- It is preferable not to allocate a land on the corner (lands facing two or more streets).

- No land shall be allocated for telecommunications tower within areas of 6-floor buildings or more within the following zones:

- A. Investment Buildings Areas "A" (BA).
- B. Investment Buildings Areas "B" (BB).
- C. Investment Buildings Areas "B1" (BB1).
- D. Investment Buildings Areas "B2" (BB2).
- E. Investment Buildings Areas "C" (BC).
- F. Investment Buildings Areas "D" (BD).
- G. Investment Buildings Areas "H" (BH).
- H. Green Buildings Areas "A" (GBA).
- I. Green Buildings Areas "A" (GBA).
- J. Green Buildings Areas "B" (GBA).

6. Land must not be allocated in subdivision application requests.